

Basic Parameters

Model		-	GWH09AGBXB-K6DNA1A
Product Code		-	CB385017100/CB385017101
Power Supply	Rated Voltage	V~	220-240
	Rated Frequency	Hz	50
	Phases	-	1
Power Supply Mode		-	Outdoor
Cooling Capacity		W	2700
Heating Capacity		W	2800
Cooling Power Input		W	725
Heating Power Input		W	685
Cooling Current Input		A	3.45
Heating Current Input		A	3.19
Rated Input		W	1500
Rated Cooling Current		A	6
Rated Heating Current		A	7.5
Air Flow Volume		m ³ /h	550/520/480/400/340/310/280
Dehumidifying Volume		L/h	0.8
EER		W/W	3.72
COP		W/W	4.09
SEER		-	6.8
SCOP (Average/Warmer/Colder)		-	4.2/5.3/-
Application Area		m ²	10-16

Indoor Unit Parameters

Indoor Unit Model	-	GWH09AGBXB-K6DNA1A/I
Indoor Unit Product Code	-	CB385N17100/CB385N17101
Fan Type	-	Cross-flow
Fan Diameter Length (D×L)	mm	Φ93×580
Cooling Speed	r/min	1300/1200/1120/1050/920/800/750
Heating Speed	r/min	1300/1200/1120/1050/950/850/800
Fan Motor Power Output	W	20
Fan Motor RLA	A	0.22
Fan Motor Capacitor	μF	1
Evaporator Form	-	Aluminum Fin-copper Tube
Evaporator Pipe Diameter	mm	Φ5
Evaporator Row-fin Gap	mm	2-1.4
Evaporator Coil Length (L×D×W)	mm	584×22.8×266.7
Swing Motor Model	-	MP24BA/MP24AK/MP24HF
Swing Motor Power Output	W	1.5/1.5/1.5
Fuse Current	A	3.15
Sound Pressure Level	dB (A)	Cooling: 40/37/35/33/29/26/21 Heating: 40/37/35/33/30/26/24
Sound Power Level	dB (A)	Cooling: 56/49/47/45/41/37/34 Heating: 55/49/47/45/42/38/35
Dimension (W×H×D)	mm	779X260X185
Dimension of Carton Box (L×W×H)	mm	823X316X247
Dimension of Package (L×W×H)	mm	828X332X258
Net Weight	kg	8
Gross Weight	kg	9.5

Outdoor Unit Parameters

Outdoor Unit Model	-	GWH09AGBXB-K6DNA1A/O
Outdoor Unit Product Code	-	CB385W17100
Compressor Manufacturer	-	ZHUHAI LANDA COMPRESSOR CO., LTD.
Compressor Model	-	QXF-A082zC170
Compressor Oil	-	ZE-G;ES RB68GX or equivalent
Compressor Type	-	Rotary
Compressor LRA.	A	15
Compressor RLA	A	2.56
Compressor Power Input	W	757
Compressor Overload Protector	-	/
Throttling Method	-	Capillary
Set Temperature Range	°C	16~30
Cooling Operation Ambient Temperature Range	°C	-15~43
Heating Operation Ambient Temperature Range	°C	-15~24
Condenser Form	-	Aluminum Fin-copper Tube
Condenser Pipe Diameter	mm	Φ7
Condenser Rows-fin Gap	mm	1-1.2
Condenser Coil Length (L×D×W)	mm	666×19.05×527
Fan Motor Speed	rpm	850
Fan Motor Power Output	W	30
Fan Motor RLA	A	0.4
Fan Motor Capacitor	μF	/
Outdoor Unit Air Flow Volume	m ³ /h	1950
Fan Type	-	Axial-flow

Fan Diameter	mm	Φ400
Defrosting Method	-	Automatic Defrosting
Climate Type	-	T1
Isolation	-	I
Moisture Protection	-	IPX4
Permissible Excessive Operating Pressure for the Discharge Side	MPa	4.3
Permissible Excessive Operating Pressure for the Suction Side	MPa	2.5
Sound Pressure Level	dB (A)	51
Sound Power Level	dB (A)	60
Dimension (W×H×D)	mm	732X555X330
Dimension of Carton Box (L×W×H)	mm	791X373X590
Dimension of Package (L×W×H)	mm	794X376X615
Net Weight	kg	24.5
Gross Weight	kg	27
Refrigerant	-	R32
Refrigerant Charge	kg	0.5

Connection Pipe Parameters

Connection Pipe Length	m	5
Connection Pipe Gas Additional Charge	g/m	16
Outer Diameter Liquid Pipe	inch	1/4
Outer Diameter Gas Pipe	inch	3/8
Max Distance Height	m	10
Max Distance Length	m	15



Note: The connection pipe applies metric diameter.

The above data is subject to change without notice. Please refer to the nameplate of the unit.

3.2 Capacity Variation Ratio According to Temperature

The models for 07K ~ 24K with heating operation ambient temperature range of -15°C~24°C



Cooling ►

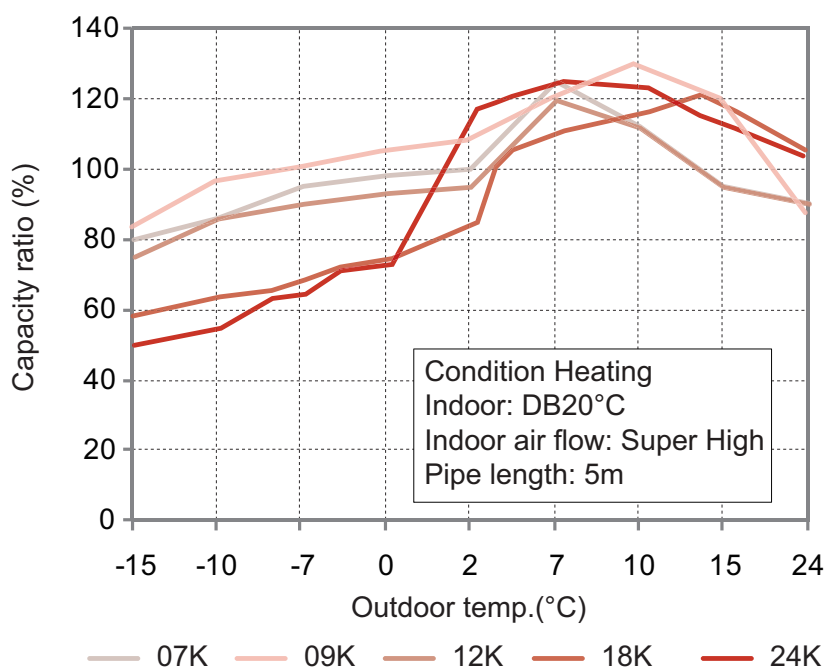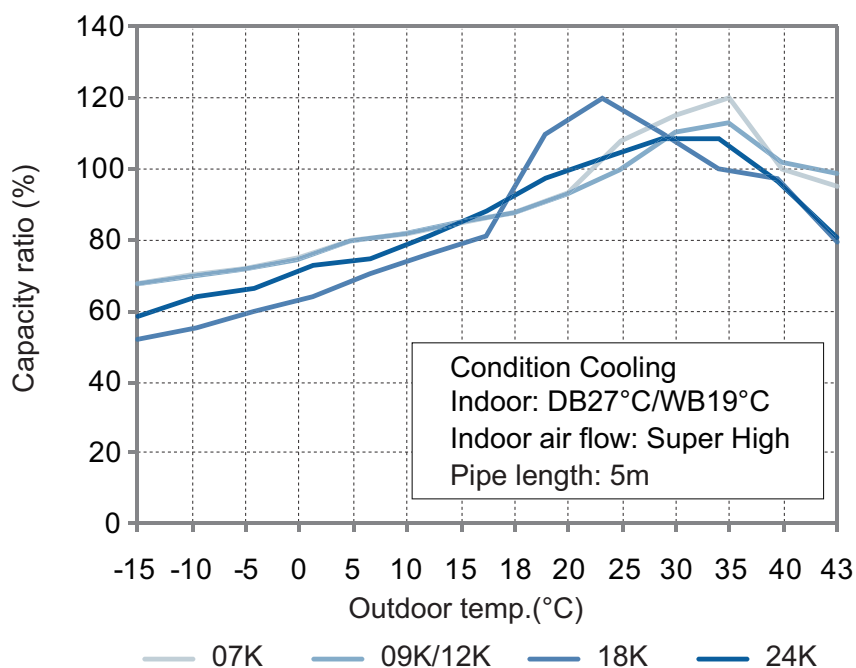

◀ Heating

The models for 09K with heating operation ambient temperature range of -22°C~24°C



Cooling ►

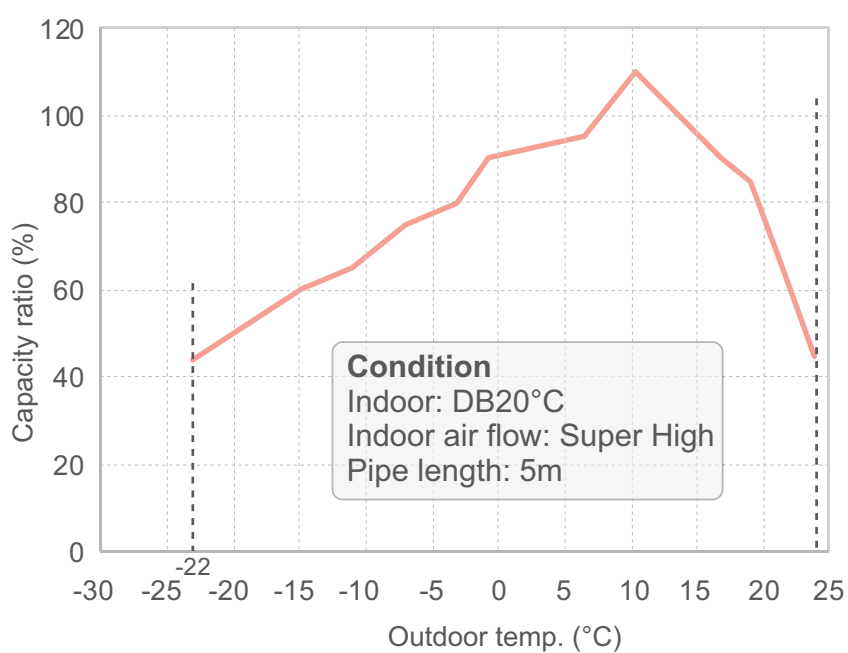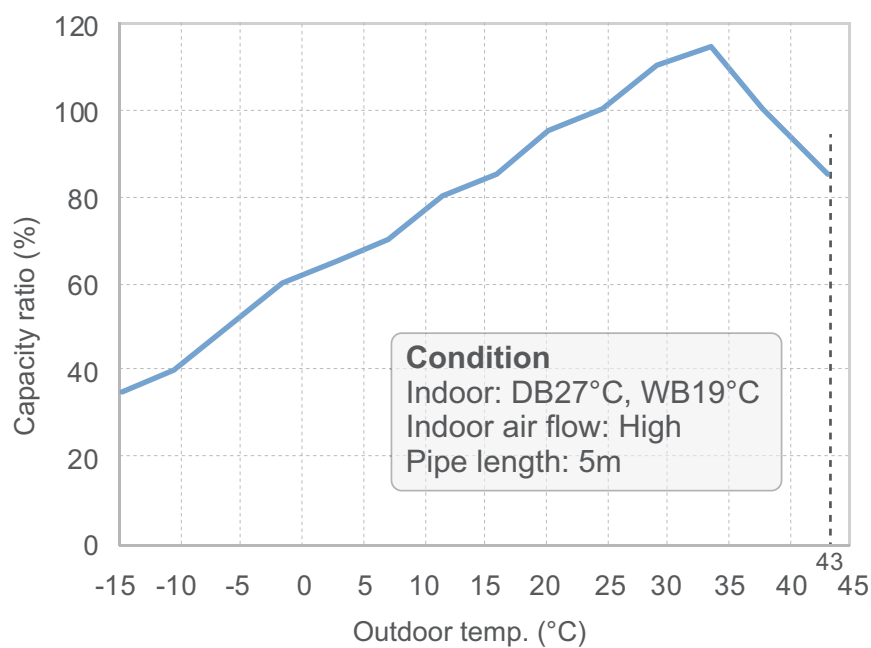

◀ Heating

The models for 09K ~ 24K with heating operation ambient temperature range of -25°C~30°C



Cooling ►

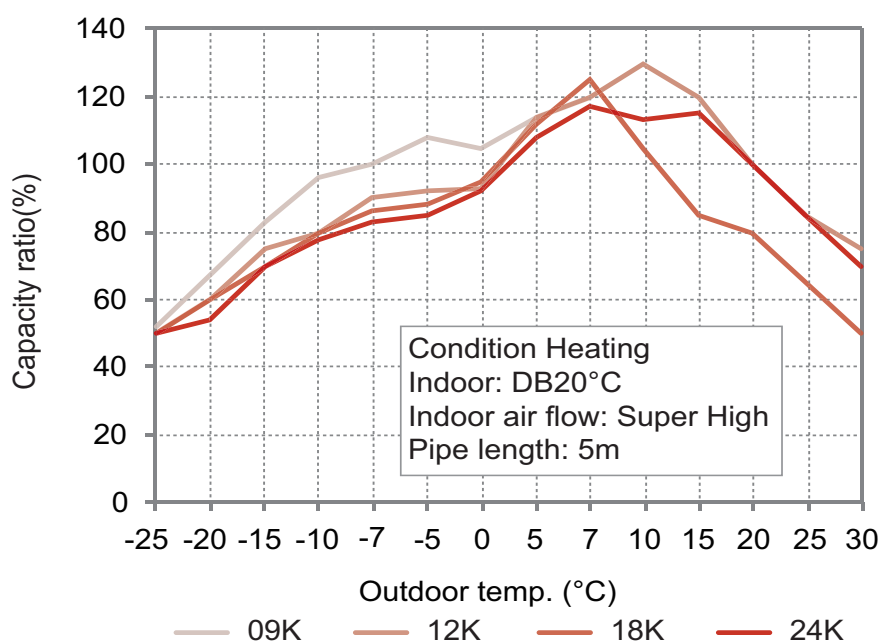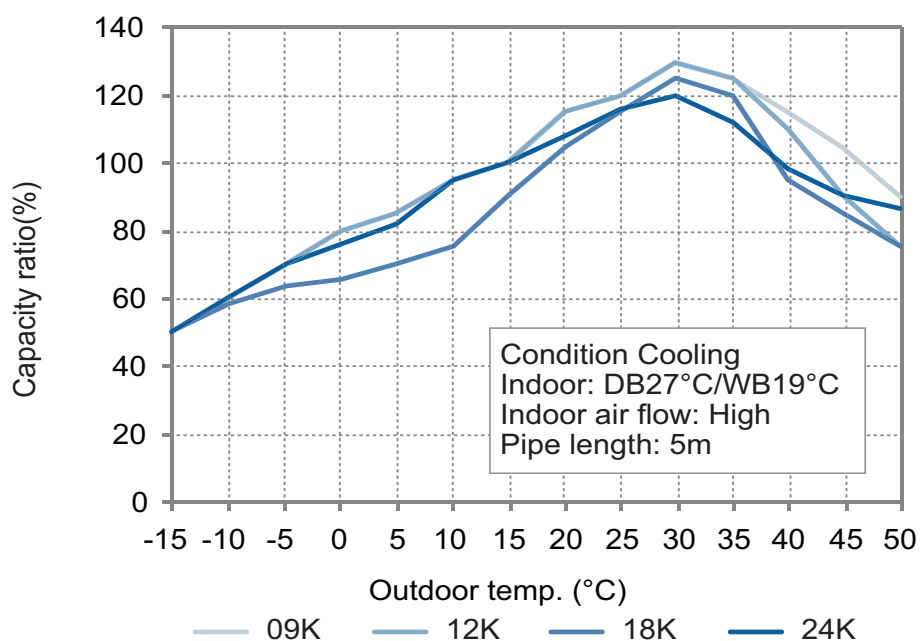

◀ Heating

The models for 09K ~ 24K with heating operation ambient temperature range of -15°C~30°C


Cooling ►

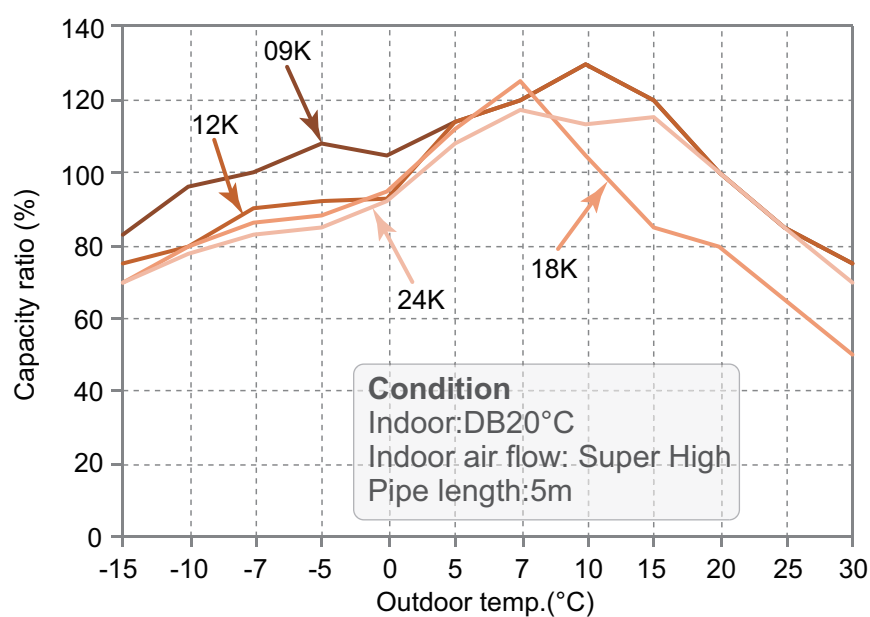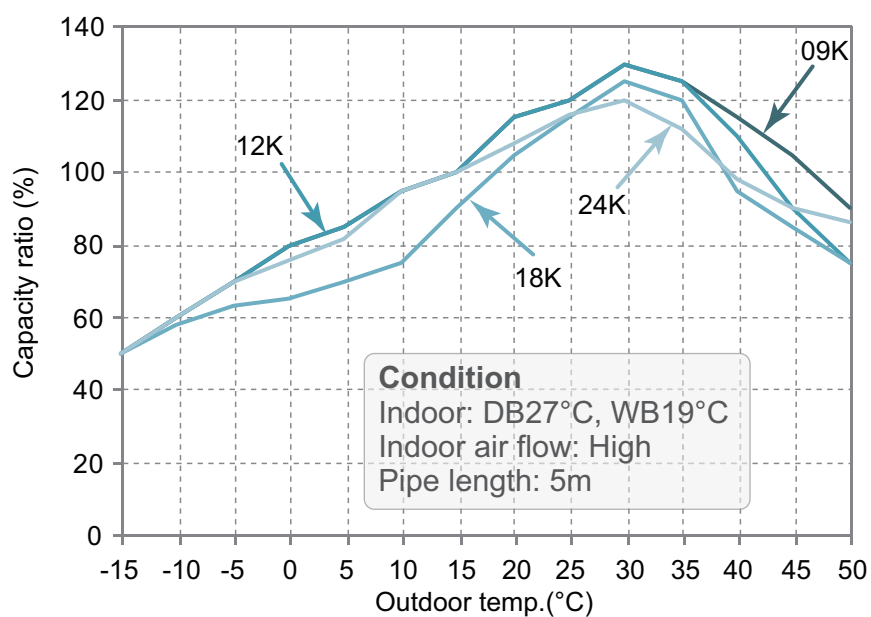


◄ Heating

4. Outline Dimension Diagram


4.1 Indoor Unit

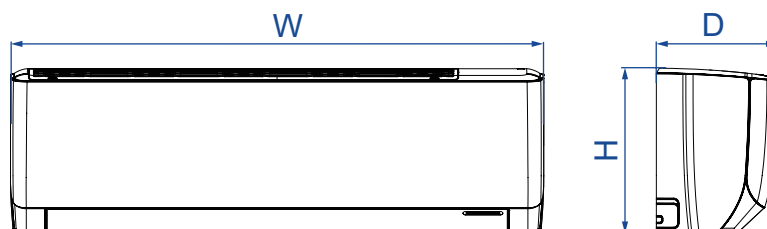


AGA

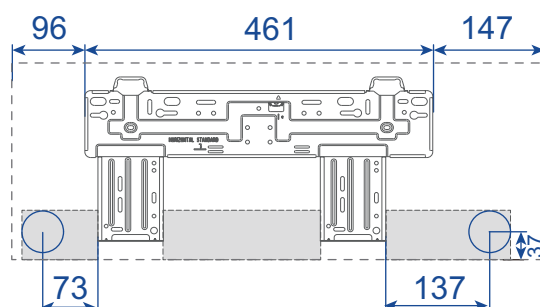


AGB

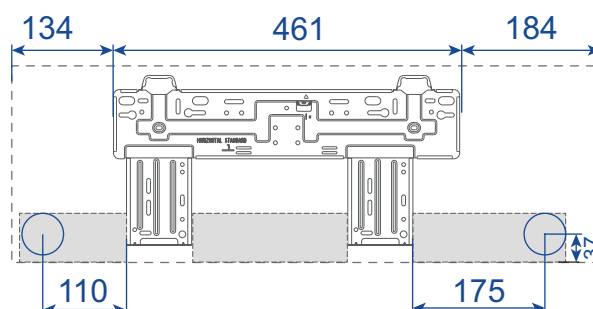

AGC

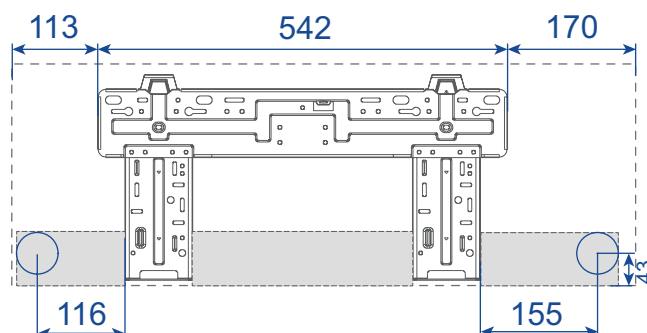

4.2 Outdoor Unit

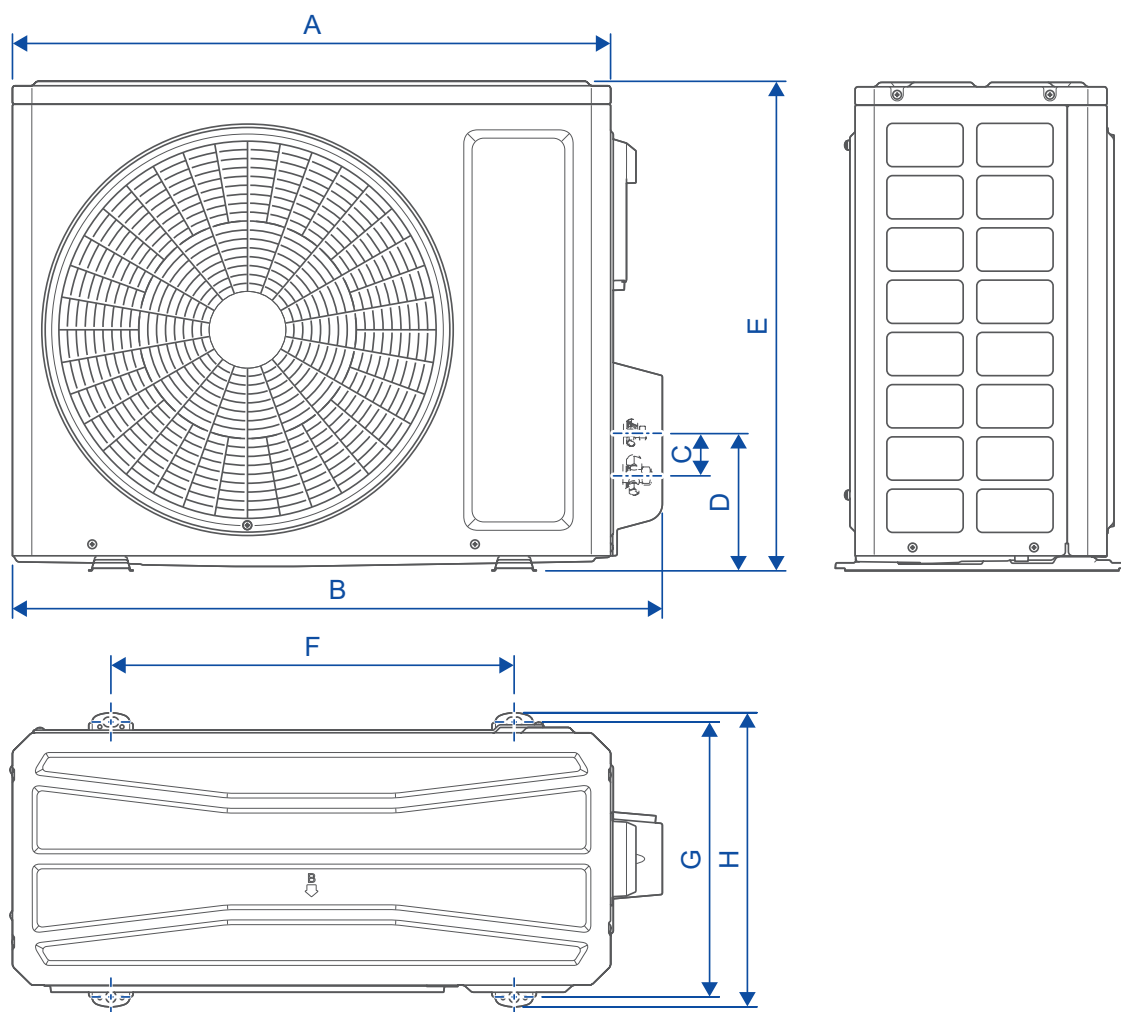

NOTE: The appearance of outdoor unit is for reference only.

Unit: mm

Outdoor Unit Model	A	B	C	D	E	F	G	H
GWH07AGA-K6DNA1A/O	650	710	65	158.8	450	430	271	293
GWH09AGBXB-K6DNA1A/O	675	732	65	163	555	455	310	330
GWH09AGAXB-K6DNA1B/O								
GWH09AFC-K6DNA2F/O								
GWH12AFC-K6DNA2F/O								
GWH18AGD-K6DNA1D/O								
GWH09ACCBXB-K6DNA1G/O								
GWH12ATCXB-K6DNA4G/O								
GWH18AGDXB-K6DNA1Z/O								
GWH09AGBXB-K6DNA1E/O								
GWH12AWCXB-K6DNA3E/O								
GWH12AWBXB-K6DNA3F/O								
GWH09AGCXB-K6DNA1H/O								
GWH09AWAXB-K6DNA1C/O								
GWH09AWBXB-K6DNA1C/O								
GWH12AGBXB-K6DNA1Z/O								
GWH12AGBXB-K6DNA1A/O								
GWH12AGBXB-K6DNA4C/O								
GWH12AGBXB-K6DNA1I/O								
GWH12AGCXB-K6DNA1A/O								
GWH12AGCXB-K6DNA1Z/O								
GWH18AGD-K6DNA1E/O	745	802	65	163	555	513	331	350
GWH18AGDXD-K6DNA1Z/O								
GWH12AWCXD-K6DNA1D/O								
GWH24AGD-K6DNA1C/O	805	873	65	164	555	528	349	376
GWH24AGDXE-K6DNA1Z/O								
GWH24AGDXE-K6DNA1A/O								
GWH24AFE-K6DNA2I/O	889	958	65	165.6	660	570	371	402